



EXLcanada.com

info@EXLCanada.com


PDS: EXLCanada DNG (Diesel and Natural Gas Engine) Top Off

ER/AW/AF/EP

**EXLCanada DNG (Diesel and Natural Gas Engine) Top Off**, enhanced by billions of spherical tungsten disulphide nanoparticles. These Energy Reducing, **Anti-Wear**, **Anti-Friction** and **Extreme Pressure** particles serve as submicron-sized shock absorbers, preventing exposure to hydraulic/shear pressures, and also function as tiny ball-bearings that roll on impact, exfoliate and attached to surfaces, improving anti-friction and anti-wear properties of host oil. **EXLCanada DNG TopOff** has shown to extend engine oil (TBN raised) and component life, extend service intervals, improve power and torque performance, reduce emissions, reduce engine noise and improve fuel economy. Compatible with mineral and synthetic oils. **Environmentally Friendly**.


Packaging: Presently 18.9 litre pail, 1 litre bottle (treats

**Application: Diesel and Natural Gas Engines. Treatment Rate: 3% by volume of engine oil.**

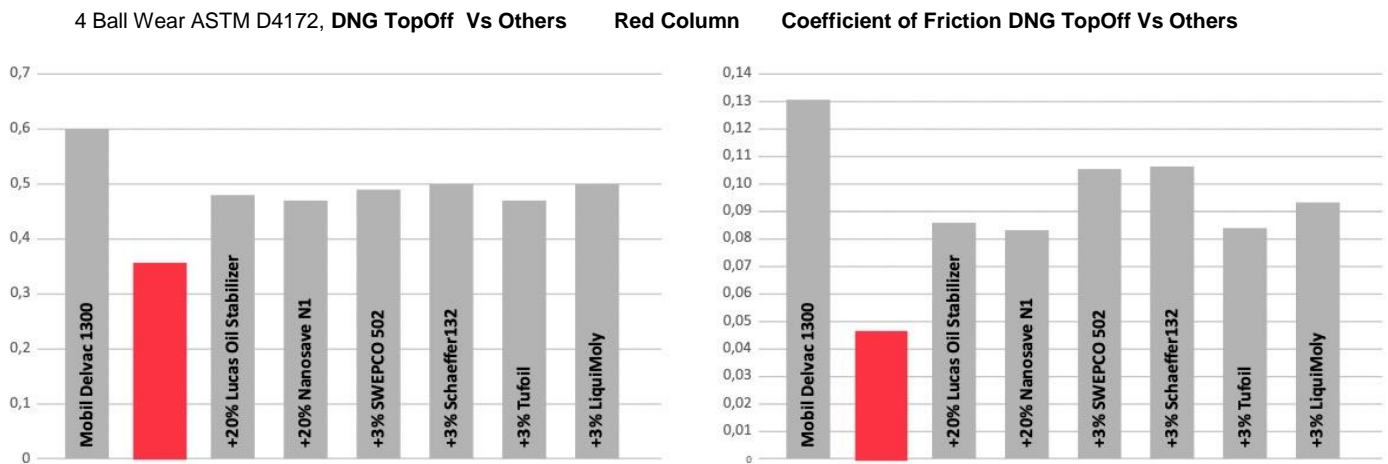

**EXLCanada DNG TopOff** has a tungsten disulphide nano particle, spherically shaped, multilayered, submicron sized, formed into nano sized onion layered like ball bearings.

The layers exfoliate in working conditions and penetrate into asperities (pitting, scoring...) of the metal within engines, gear boxes & final drives of all lubricated surfaces, a protective coating forms that has the lowest coefficient of friction known for metal coatings.

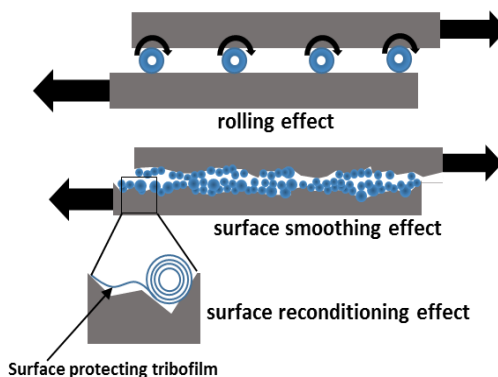

**EXLCanada DNG TopOff** tungsten disulphide nano particle is completely different to all PTFE, Molybdenum disulphide and graphite's oil additives, these are all platelet structured technologies, therefore have little elasticity or shock absorbing properties.

**Tech Specs:** Color: Dark Gray **Carrier:** Fully synthetic oil **Viscosity:** 300 – 450 cSt at 40 °C (104°F) **Density:** 0.9 – 0.97 g/cm<sup>3</sup> (7.51-8.10 lb/gal) **Safety:** REACH Compliant

Disclaimer: EXLCanada recommends an analysis program is used in conjunction with any additive/maintenance program. EXLCanada and any affiliates all will not be held responsible for any damages from the use of EXLCanada products.